

FRS-60 Centrifugal Feeder

Designed for Quiet, High Speed Feeding



Product Overview:

Shibuya Hoppmann's standard FRS-60 is specifically designed to feed a wide range of large bottles and parts. The delivery rate varies from moderate to high speed depending on part characteristics. The FRS-60 is engineered to interface with Shibuya Hoppmann prefeeders, accumulating conveyors, assembly systems and other downstream equipment.

Product Specifications:

	<u>ANSI</u>	<u>Metric</u>
A. Overall Width at Exit Zone	85"	2159mm
B. Overall Width	82"	2083mm
C. Overall Height	66" ± 5"	1676 ± 127mm
D. Discharge Height	40" ± 5"	1016 ± 127mm
E. Bowl Inside Diameter	51.79"	1315mm
F. Rim Width	8"	203mm
G. Scallop Length	12"	305mm

Standard Models:

	<u>RS60XXXDSA</u>	<u>RS60XXXASA</u>
Part Number	DC	AC
Motor Style	3/4 hp	3/4 hp
Horsepower	90V	208-230/480V
Motor Voltage	2500lbs	1134 kg
Weight Untooled		

Standard Features:


- Aluminum bowl with stainless steel walls
- Stainless steels cover
- Air clutch
- Backup ring

Required Accessories:

FRS Series Scallop Kit URTHCAST64

Available Options:

- Washdown motor
- Urethane scallop kit
- NEMA 1 encased controller

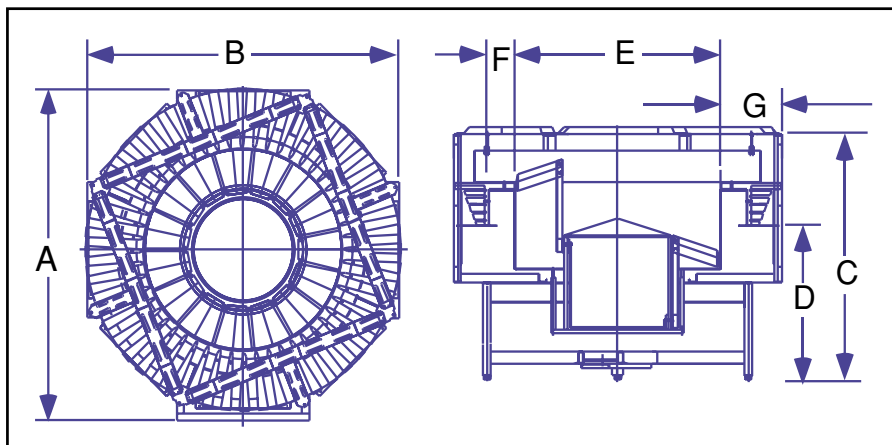

Shibuya Hoppmann Corporation strives to improve its products and reserves the right to change or discontinue specifications & designs shown in this brochure without notice and without incurring obligation. 01/07