
L410 A Label Applicator



Standard Features:

- On board diagnostics
- Product recipe capabilities
- On-the-fly label adjustments
- No tool required label changeover
- Dual nip roller for less web breakage
- Streamline footprint
- Assortment of modules including Tamp
- Right-hand and left-hand

Available Options:


- Tamp-On, Blow-On, Tamp-Blow and Wipe-On modules
- Swing arm pallet labeler
- Wipe-On brush accessory kits
- Harsh environment head
- Line encoder kit upgrades
- Label low level sensor & beacon fault upgrades
- Adjustable stands and machine mount supports
- Coding/inspection accommodation

Product Overview:

The L410A pressure sensitive label applicator is the proven, robust solution designed to meet the demands of expanding labeling requirements and higher production speeds. Durable, industrial-grade construction assures you that the L410A label applicator will provide around-the-clock operation you can depend on. The easy to use operator interface allows for quick changes to label speeds and position. Flexible design features and multiple application options allow you to easily tailor the L410A to cover your specific labeling needs.

Labeling Rate (PPM)	150ppm to 300ppm *	
Label Head Speed	2,400"/min (1016mm/sec)	
Accuracy	± 0.02" (± 0.5mm)	
Controls	Programmable Logic Controller	
Label Drive Motor	High Torque Micro Stepper	
Unwind Roll Diameter	14" (376mm) OD x 3" (76mm) ID	
Label Detection	Photo Electric	
Power Requirements	115/230VAC, 50/60 Hz, 10 Amp	
Environment	41-104°F (5-40°C), 25-85% relative humidity	

^{*}Dependent upon label and application

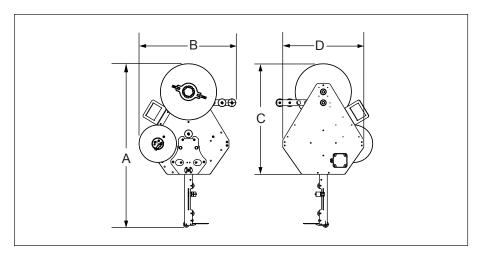

Product Specifications		ANSI	Metric
Α	Overall Height - Peeler Tip to Unwind Wheel	41.4"	2052mm
В	Overall Width - Rewind Wheel to Dancer Arm	24.5"	622mm
С	Applicator Height	23.0"	564mm
D	Applicator Width	20.5"	521mm

Headquarters 13129 Airpark Dr. Suite 120 Elkwood, VA 22718 540.829.2564 t 800.368.3582 t 540.829.1726 f Sales Office 1445 Brookville Way Suite F Indianapolis, IN 46239 317.322.0754 t 800.368.3582 t 317.322.0794 f Manufacturing Office 291 Dillard Road Madison Heights, VA 24572 434.929.4746 t 800.543.0915 t 434.929.4959 f

www.ShibuyaHoppmann.com | sales@ShibuyaHoppmann.com